



XC938

WHEEL LOADER



Engine	Cummins QSB6.7 Tier III
Maximum Power	99 kW @ 2200 rpm
Operating Weight	11,000 kg
Bucket Capacity	1.8 m ³
Rated Operating Load	3000 kg



SOLID
TO SUCCEED

XC938

SPECIFICATIONS

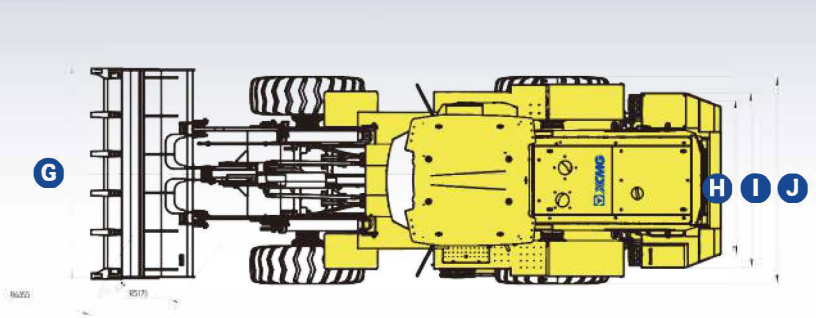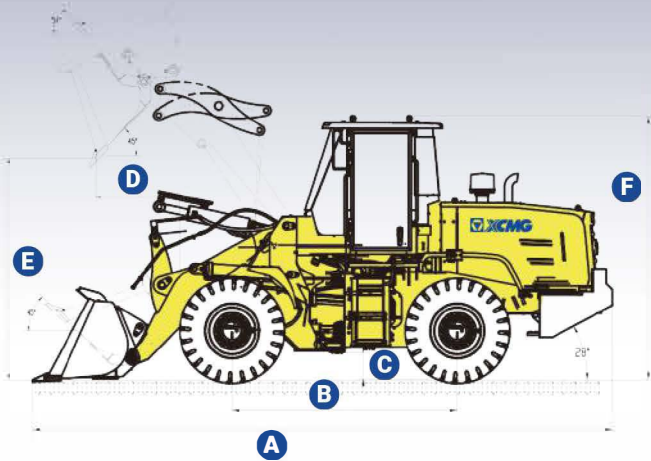

XC938	A	B	C	D	E	F	G	H	I	J
mm	7705	2900	370	1010	2930	3045	2482	1850	2060	2290

ENGINE

Make	Cummins
Model	QSB 6.7
Emission Regulation	Tier III
Maximum Power	99 kW @ 2200 rpm
Displacement	6.7 L

TRANSMISSION

Make	XCMG
Model	MYF 130
Type	Planetary, power shift
Max Travel Speed fwd	36 km/h

AXLES

Differential Type	Conventional
-------------------	--------------

STEERING

Steering Configuration	Articulated
------------------------	-------------

TYRES

Size	17.5 R25
Type	Tubeless

HYDRAULIC SYSTEM

Main Pump Type	Gear
Boom Lifting Time	5.0 s
Hydraulic Cycle Time	8.9 s

BRAKES

Service Brake System	Caliper discs brake
Service Brake Actuation	Air over hydraulic
Parking Brake System	Drum
Parking Brake Actuation	Mechanical

LOADING SPECIFICATIONS

Bucket Capacity	1.8 m ³
Rated Operating Load	3,000 kg
Dumping Angle	45°
Tipping Load Max (Steering)	7,000 kg
Tipping Load Max (Straight)	9,200 kg
Maximum Dump Height	2930 mm
Maximum Dumping Distance	1010 mm
Maximum Digging Force	130 kN

OPERATING WEIGHT

Operating Weight	11,000 kg
------------------	-----------

OPERATOR STATION

Cabin Safety	ROPS & FOPS
--------------	-------------

OPTIONAL EQUIPMENT

Quick coupler function with forks
