



XCMG



XC958

WHEEL LOADER

Engine	Cummins QSB6.7 Tier III
Maximum Power	164 kW @ 2200 rpm
Transmission	ZF 4BP210
Service Brake System	Wet Disc Brakes
Operating Weight	18,700 kg
Bucket Capacity	3.5 m ³
Rated Operating Load	5,500 kg





XCMG

SOLID
TO SUCCEED

XC958

SPECIFICATIONS

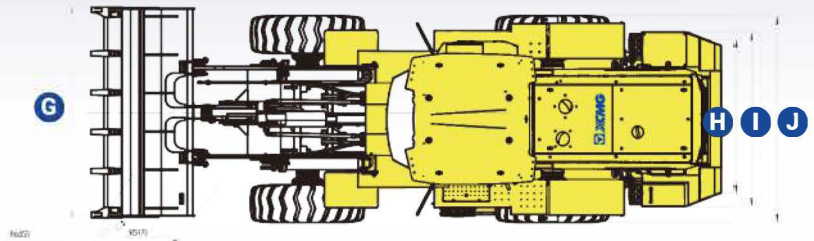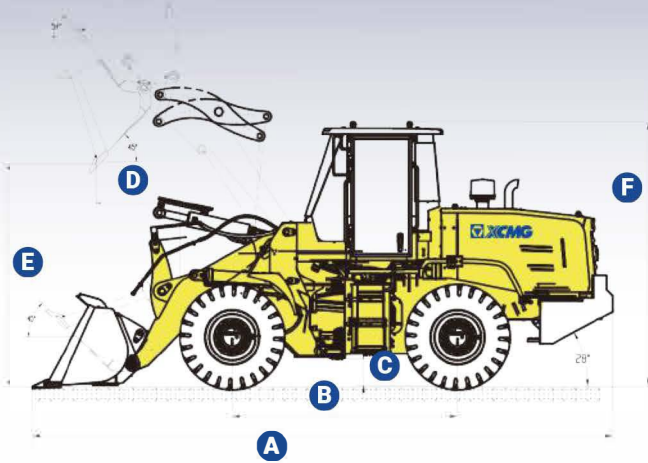

XC958	A	B	C	D	E	F	G	H	I	J
mm	8335	3350	440	1140	3050	3435	3000	2250	2500	2996

ENGINE

Make	Cummins
Model	QSB 6.7
Emission Regulation	Tier III
Maximum Power	164 kW @ 2200 rpm
Displacement	6.7 L

TRANSMISSION

Make	ZF
Model	4BP210
Type	Countershaft, Powershift
Max Travel Speed fwd	38 km/h

AXLES

Differential Type	Limited slip
-------------------	--------------

STEERING

Steering Configuration	Articulated
------------------------	-------------

BRAKES

Service Brake System	Wet disc brake
Service Brake Actuation	Hydraulic
Parking Brake System	Manual electronic control
Parking Brake Actuation	Hydraulic

LOADING SPECIFICATIONS

Bucket Capacity	3.5 m ³
Rated Operating Load	5,500 kg
Bucket Width	3000 mm
Tipping Load Max (Steering)	11,500 kg
Tipping Load Max (Straight)	12,600 kg
Maximum Dump Height	3050 mm
Maximum Dumping Distance	1140 mm
Maximum Breakout Force	170 kN

HYDRAULIC SYSTEM

Main Pump Type	Gear
Boom Lifting Time	5.5 s
Hydraulic Cycle Time	10 s

OPERATING WEIGHT

Operating Weight	18,700 kg
------------------	-----------

OPERATOR STATION

Cabin Safety	ROPS & FOPS
--------------	-------------

TYRES

Size	23.5R25
Type	Tubeless