



www.gpwafrica.co.za

XE335C

LARGE EXCAVATOR

A large yellow XCMG XE335C excavator is shown in a quarry setting, with its bucket raised and dumping material. The excavator is positioned on a rocky, uneven surface, and the background shows steep, rocky hills under a clear blue sky. The excavator's arm and bucket are prominently displayed in the upper half of the image, while the main body of the machine is in the lower half.


Engine	Isuzu AA-6HK1XQP Tier II
Maximum Power	190.5 kW @ 2000 rpm
Maximum Digging Depth	6972 mm
Standard Bucket Capacity	1.4 m ³
Operating Weight	33,800 kg



SOLID
TO SUCCEED

XE335C

SPECIFICATIONS

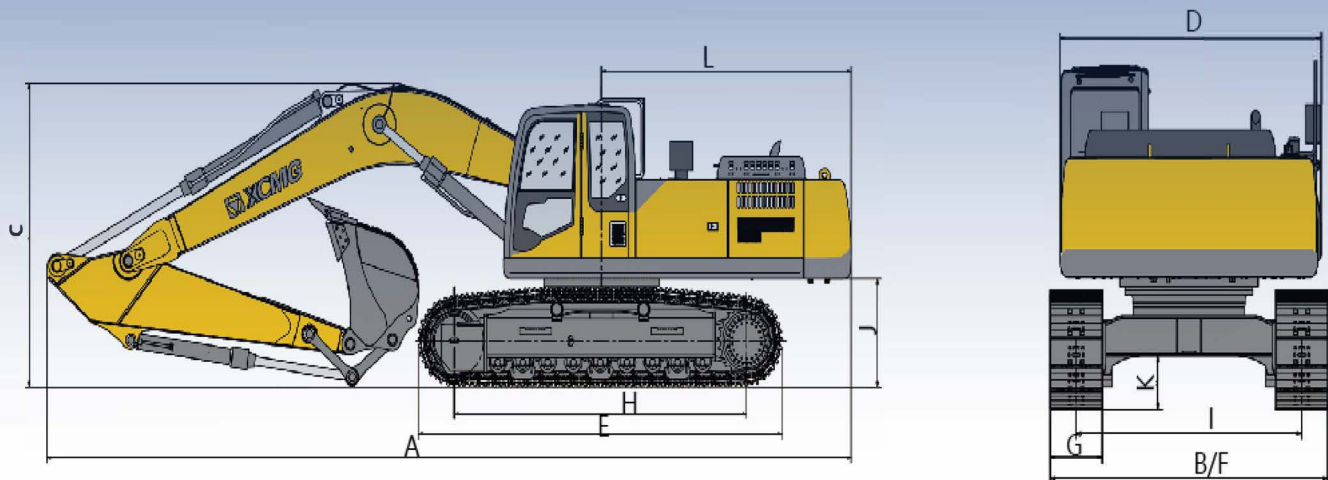

Main dimensions

Unit: mm

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
XE335C	11388	3190	3515	2950	4725	3190	600	3818	2590	1170	495	3570	940

ENGINE

Make	Isuzu
Model	AA - 6HK1XQP
Emission Regulation	Tier II
Maximum Power	190.5 kW @ 2000 rpm
Displacement	7.79 L
Number of cylinders	6

WORKING DEVICE

Standard Bucket Capacity	1.4 m ³
Arm Length	2670 mm
Arm Digging Force	225 kN
Boom Length	6400 mm
Bucket Digging Force	263 kN

TRACK DRIVE

Maximum Travel Speed	9.7 r/min
----------------------	-----------

HYDRAULIC SYSTEM

Main Pump	Two piston pumps
Rated flow of main pump	2 x 280 L/min
Main safety valve pressure	34.3 / 37 MPa
Travel system pressure	34.3 MPa
Swing system pressure	26.5 MPa
Pilot system pressure	3.9 MPa

SWING SYSTEM

Swing Speed	9.7 r/min
-------------	-----------

WORKING RANGE

A Max. digging height	10074 mm
B Max. dumping height	6898 mm
C Max. digging depth	6972 mm
D Max. digging depth cut for 2240mm(8ft) level bottom	6728 mm
E Max. vertical wall digging depth	5366 mm
F Max. digging radius	10650 mm
G Min. radius of gyration	4424 mm

OPERATOR STATION

Cab Safety	ROPS
------------	------

