



www.gpwafrica.co.za

XE370CA


LARGE EXCAVATOR

Engine	Isuzu AA-6HK1XQP Tier II
Maximum Power	190.5 kW @ 2000 rpm
Maximum Digging Depth	6927 mm
Standard Bucket Capacity	1.6 m ³
Operating Weight	36,600 kg



SOLID
TO SUCCEED

XE370CA SPECIFICATIONS

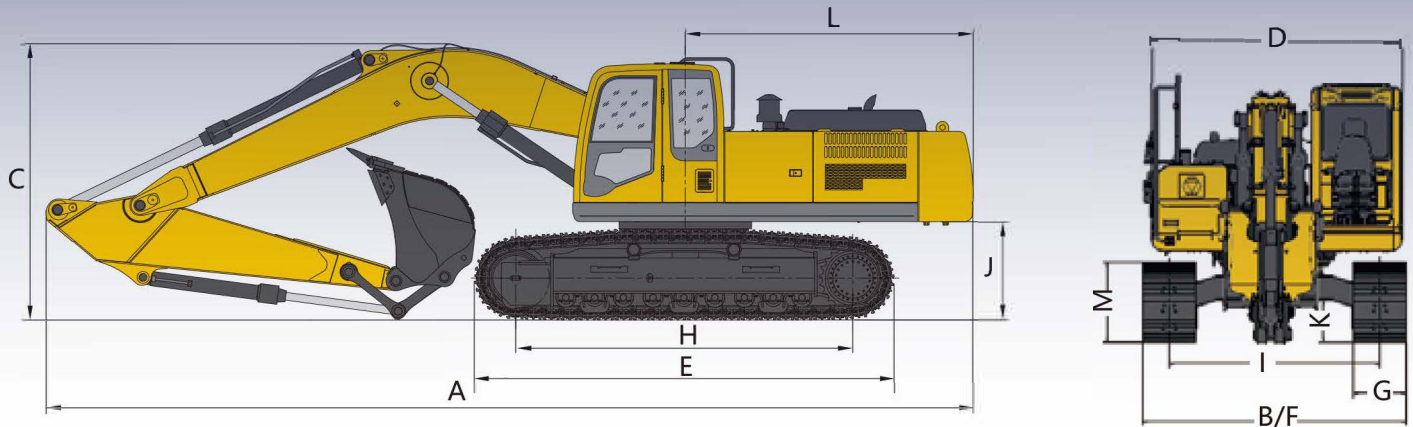

Main dimensions

Unit: mm

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
XE370CA	11386	3190	3530	2950	5035	3190	600	4040	2590	1197	500	3570	1105

ENGINE

Make	Isuzu
Model	AA - 6HK1XQP
Emission Regulation	Tier II
Maximum Power	190.5 kW @ 2000 rpm
Displacement	7.79 L
Number of cylinders	6

WORKING DEVICE

Standard Bucket Capacity	1.6 m ³
Arm Length	2670 mm
Arm Digging Force	225 kN
Boom Length	6400 mm
Bucket Digging Force	263 kN

TRACK DRIVE

Maximum Travel Speed	5.4 / 3.2 km/h
----------------------	----------------

HYDRAULIC SYSTEM

Main Pump	Two piston pumps
Rated flow of main pump	2 x 320 L/min
Main safety valve pressure	34.3 / 37.3 MPa
Travel system pressure	34.3 MPa
Swing system pressure	26.5 MPa
Pilot system pressure	3.9 MPa

SWING SYSTEM

Swing Speed	9.7 r/min
-------------	-----------

WORKING RANGE

A	Max. digging height	10123 mm
B	Max. dumping height	6947 mm
C	Max. digging depth	6927 mm
D	Max. digging depth cut for 2240mm(8ft) level bottom	6709 mm
E	Max. vertical wall digging depth	5312 mm
F	Max. digging radius	10470 mm
G	Min. radius of gyration	4424 mm

