



www.gpwafrica.co.za

XE950DA

LARGE EXCAVATOR



A large yellow XCMG excavator is shown in a rugged, mountainous landscape. The excavator is positioned on a rocky surface, with its arm extended and bucket raised. The background features steep, rocky mountains under a clear sky. The excavator's body is yellow with black tracks, and the XCMG logo is visible on the arm.

Engine	Perkins 2806D - E18TA Tier III
Maximum Power	447.5 kW @ 2100 rpm
Maximum Digging Depth	7170 mm
Standard Bucket Capacity	6 m ³
Operating Weight	91,000 kg



SOLID
TO SUCCEED

XE950DA SPECIFICATIONS

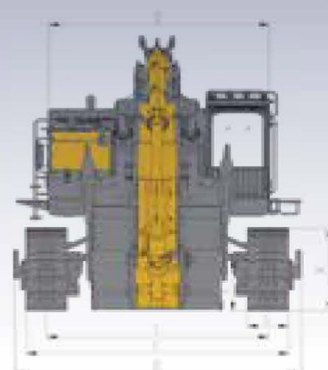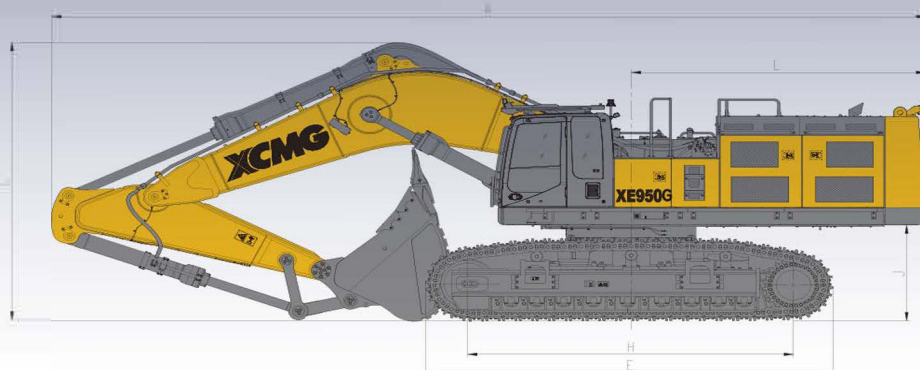

Main dimensions

Unit: mm

Model	A	B	C	D	E	F	G	H	I	J	K	L	M
XE950DA	13655	4545	4980	3490	6367	4150	650	5090	3500	1660	870	4700	1487

ENGINE

Make	Perkins
Model	2806D - E18TA
Emission Regulation	Tier III
Maximum Power	447.5 kW @ 2100 rpm
Displacement	18.1 L
Number of cylinders	6

WORKING DEVICE

Standard Bucket Capacity	6 m ³
Arm Length	2925 mm
Arm Digging Force	370 kN
Boom Length	7250 mm
Bucket Digging Force	463 kN

TRACK DRIVE

Maximum Travel Speed	4.0 / 2.4 km/h
----------------------	----------------

HYDRAULIC SYSTEM

Main Pump	Two plunger pumps
Rated flow of main pump	2 x 476 L/min
Prime valve pressure	35 MPa
Travel system pressure	35 MPa
Swing system pressure	29 MPa
Pilot system pressure	3.9 MPa

SWING SYSTEM

Swing Speed	6.2 r/min
-------------	-----------

WORKING RANGE

A	Max. digging height	12680 mm
B	Max. dumping height	7990 mm
C	Max. digging depth	7170 mm
D	Max. digging depth cut for 2240mm(8ft) level bottom	7030 mm
E	Max. vertical wall digging depth	4550 mm
F	Max. digging radius	12660 mm
G	Min. radius of gyration	5020 mm

OPERATOR STATION

Cab Safety	ROPS
------------	------

